

Technical Notes

IOC017


2073 Pluggable Interface Modules

September 1, 2000

TTL in, ECL out Single Ended

The IOC017 PIM accepts two TTL signals, and produces 2 single ended ECL output signals. Input polarities may be inverted independently. The IOC017 uses two BNC output connectors, two BNC input connectors and operates up to 20 Mbps. It drives the TTL daisy chain bus and via jumpers can drive the TTL global bus.

The IOC017 requires a single slot.

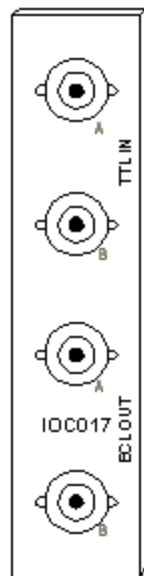

Input:

- A in TTL
- B in TTL

Output:

- A out ECL
- B out ECL

Chassis:

- Model 2073-010
- Model 2073-011
- Model 2073-012

Price Class:

- Class I

210 S. 3RD ST. / NORTH WALES, PA 19454

PHONE 215-699-2060 / FAX 215-699-2061