

Technical Notes

IOC019


2073 Pluggable Interface Modules

August 1, 2001

TTL BNC in / ECL out

The IOC019 PIM accepts two TTL signals, and produces 2 ECL output signals. All input polarities may be inverted independently. The IOC019 uses two triax output connectors, two BNC input connectors and operates up to 20 Mbps.

The IOC019 requires a single slot.

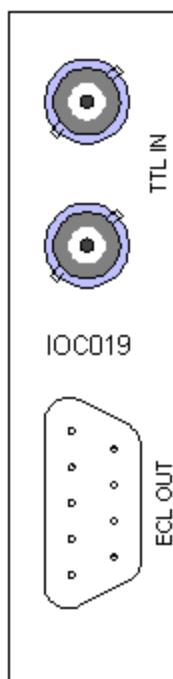

Input:

- A in TTL BNC
- B in TTL BNC

Output:

- A out ECL D-9
- B out ECL D-9

Chassis:

- Model 2073-012

Price Class:

- Class II

210 S. 3RD ST. / NORTH WALES, PA 19454
PHONE 215-699-2060 / FAX 215-699-2061