

Technical Notes

IOC203


2073 Pluggable Interface Modules

September 1, 2000

RS-422 in, RS-232 out

The IOC203 PIM accepts two RS-422 signals and produces two RS-232 output signals. Input polarities may be inverted independently. The IOC203 uses two Triax input/two BNC output connectors and operates up to 500 kbps.

The IOC203 requires a single slot.

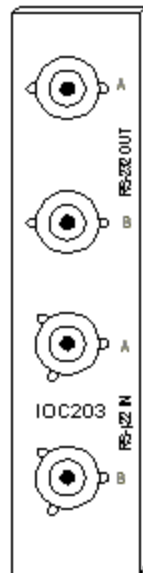

Input:

- A in RS-422 Triax
- B in RS-422 Triax

Output:

- A out RS-232 BNC
- B out RS-232 BNC

Chassis:

- Model 2073-010
- Model 2073-011
- Model 2073-012

Price Class:

- Class I

210 S. 3RD ST. / NORTH WALES, PA 19454
PHONE 215-699-2060 / FAX 215-699-2061