

Technical Notes

IOC403


2073 Pluggable Interface Modules

September 1, 2000

BiPolar in, TTL out

The IOC403 PIM accepts two BiPolar signals and produces two TTL outputs. All input and output polarities may be inverted independently. The IOC403 uses two BNC input connectors, two BNC output connectors and operates up to 30 Mbps. It can also drive the daisy chain bus and global bus.

The IOC403 requires a single slot.

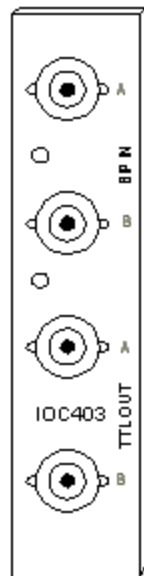

Input:

- BiPolar in A
- BiPolar in B

Output:

- TTL out A
- TTL out B

Chassis:

- Model 2073-010
- Model 2073-011

Price Class:

- Class II

210 S. 3RD ST. / NORTH WALES, PA 19454
PHONE 215-699-2060 / FAX 215-699-2061