

Technical Notes

IOC405


2073 Pluggable Interface Modules

September 1, 2000

T1 AMI in, TTL Data and Clock out

The IOC405 PIM accepts a single T1 signal and produces data and a 1.544 Mbps clock. The IOC405 T1 connection is an unshielded BNC and both clock and data are grounded shield BNCs.

The IOC405 requires a single slot.

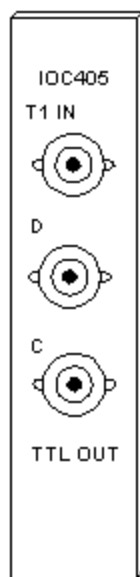

Input:

- T1 in

Output:

- TTL Data out
- TTL Clock out

Chassis:

- Model 2073-010
- Model 2073-011
- Model 2073-012

Price Class:

- Class III

210 S. 3RD ST. / NORTH WALES, PA 19454
PHONE 215-699-2060 / FAX 215-699-2061