

Technical Notes

IOC406


2073 Pluggable Interface Modules

September 1, 2000

TTL Data & Clock in, T1 AMI out

The IOC406 PIM accepts a TTL Data and Clock pair at 1.544 Mbps and produces a T1 signal. The IOC406 T1 connection is an unshielded BNC and both clock and data are grounded shield BNCs.

The IOC406 requires a single slot.

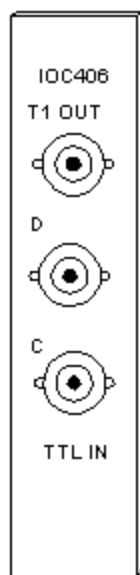

Input:

- TTL Data in
- TTL Clock in

Output:

- T1 out

Chassis:

- Model 2073-010
- Model 2073-011
- Model 2073-012

Price Class:

- Class III

210 S. 3RD ST. / NORTH WALES, PA 19454
PHONE 215-699-2060 / FAX 215-699-2061